



Congra Ezi Yaka: Pre-Cast Concrete Pad System

**Change the way
you do foundations.
Think Ezi Yaka.**

- ⚙ Build immediately after piles, post or poles are placed in position
- ⚙ No waiting for concrete to arrive or harden
- ⚙ Bearers can go on before your concrete infill
- ⚙ Ordinary piles can be backfilled with excavation material

30%*

**LABOUR SAVINGS
ON FOUNDATIONS
BUILT USING
CONQRA EZI YAKA**

*save up to 30%

Congra Ezi Yaka

Ezi Yaka pre-cast concrete foundation pads allow you to begin building immediately after piles, posts or poles are placed in position prior to

concrete infill. There's no need to wait for concrete to arrive or harden. Because this pad offers a hard surface the pile height can be established, the piles cut, the sub-floor construction begun. That means bearers can go on before your concrete infill.

Ezi Installation

BRANZ Appraisal is subject to the specific conditions of use as given in the Ezi Yaka Technical Literature.




BRANZ Appraised
Appraisal No.1139




Ezi Installation

BRANZ Appraisal 1139 states: "Footings shall bear upon a level solid bottom in accordance with NZS3604, clause 3:4. Ezi Yaka pads must be placed on the solid bottom."

(Optional) Granular Fill Height Adjustment

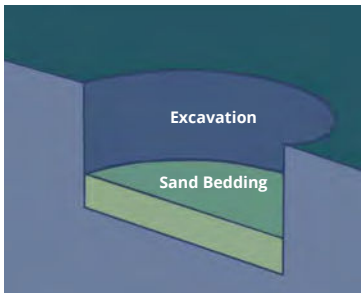


1. Spade in required damp sand or granular fill and spread over bottom of excavation.

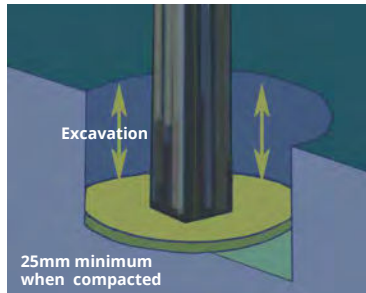

2. A plywood compactor can be cut and fixed to a suitable length of timber for the purpose of compacting a granular fill layer such as sand.



3. Lower pad into excavation and adjust as required. Pad maybe removed if required.

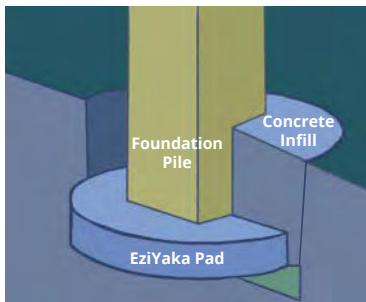

4. Place foundation pile in position. Piles may be cut to length and braced using bearer or hand while concrete infill is poured.

Installation Tools



i. Fix a ply compactor with nails to a suitable length of timber. ii. Fix supplied hooks to a suitable handle as shown. iii. Or tie the hook to a rope.

The Ezi Yaka Advantage

To approving authorities:

- BRANZ Appraisal 1139
- Ezi to inspect
- Meets NZS3604:2011, 6.4.5.4 & 6.4.5.5
- BRANZ Appraisal 1139 states: "Footings shall bear upon a level solid bottom in accordance with NZS3604, clause 3:4. Ezi Yaka pads must be placed on the solid bottom."

To specifiers:

- 50 years performance rating (structure & durability)

260mm round x 100mm thick



370mm round x 100mm round thick

To the Builders

- Cost effective
- Save up to 30% on labour
- Quick to install
- Better site planning
- Easy timber pile installation
- All weather installation
- Little or no construction bracing of piles required
- Job continuity
- Easy adjustment or realignment
- Permits height adjustment
- Pile pre-cutting ability
- Meets requirements of NZS3604:2011

Specifications

- Available in 260mm round x 100mm thick & 370mm round x 100mm thick
- BRANZ Appraisal 1139 & complies to NZS3604:2011
- 7 day curing crushing strength 17.5MPa & 28 day curing crushing strength 30MPa
- Weight approx. 260mm: 12.74kg, 370mm: 25.8kg



BRANZ Appraised
Appraisal No.1139